


2" Swing Binder Installation

#102582


Watch video tutorials on installing & using your Sailrite binder at Sailrite.com




A	feeder mouth
B	feeder ledge
C	binder slot
D	screws & washer
E	thumb screw
F	spring end



1. Attach the binder to the sewing machine by inserting the two screws with the washer **D** through the binder slot **C** (not the 3 holes above the slot) into the two holes in the bed of the machine **G**. Screw placement in the binder slot will vary from machine to machine.

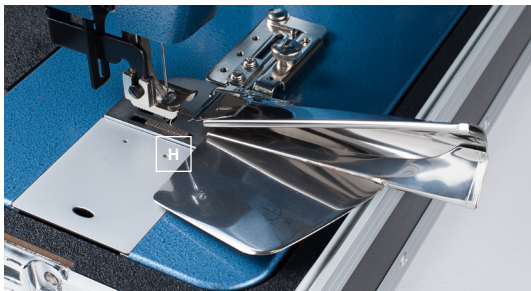

2. Adjust the feeder mouth **A** from front to back using the two screws next to the feeder mouth. Position the binder as close as possible to the front of the presser foot without touching the foot or feed dog **H**. The binder should not come into contact with the foot or the feed dog when sewing. Adjust the stitch position close to the inside edge of the binding by moving the feeder mouth from left to right using the large thumb screw **E**.

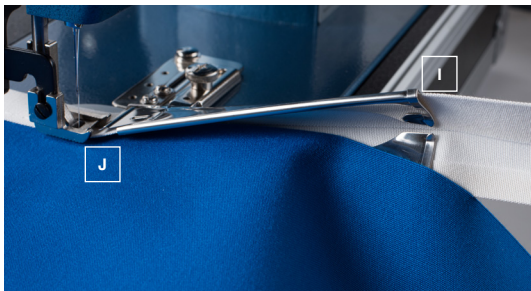

3. **I** Feed 2" binding or tape into the wide end of the feeder mouth and use a screwdriver blade to pull the binding completely through the slot. Sew off a small portion of binding to test stitch position.
4. Insert the raw fabric edge that needs binding into the crease of the binding as it exits the feeder mouth **J**. Feed the material tightly into the crease of the binding and sew for a perfectly finished edge.