



Received:09/04/2015 Completed:09/08/2015 Letter: P JB P.O.#: Test Report #: 3-09601-0-

Client's Identification Lot No: 3014-01151. Date of Mfg: 2-12-15. Style: All American AM59 Parchment (2259-54). Weight: 28.8/Linear Yard.
 Product End Use: Upholstery.

Tested For: **Ted Torres** Key Test: IMO 2010 Uph Cig 235
 Uniroyal Engineered Products
 501 South Water Street Tel: 1-(608)-873-6631 Ext:
 Stoughton, WI 53589 Fax: 1-()- -

Category: Uph.Furniture(cig) Specifier: IMO LE 2012; V 5/15 PC: 16H /dl SM/mg

TEST PERFORMED: IMO 2010 FTP Code - International Code for Application of Fire Test Procedures - Resolution MSC.307(88): Annex I - Fire Test Procedures, Part 8 - Test For Upholstered Furniture

IGNITION SOURCE: Smouldering cigarette (section 3.1)

TEST ITEM COMPOSITE:

Cover Fabric --

- Client's cover fabric: (see "Client's Identification" section above)
- Standard cover fabric, 100% inherently flame retardant polyester fabric, approx. 220 g/m²

Filling Material --

- Non flame retardant flexible polyether foam, 22 kg/m³ (1.4 lb/ft³)
- Flame retardant polyurethane foam, Code Red II 35, 45 kg/m³ (2.8 lb/ft³)
- Non flame retardant flexible polyether foam, 22 kg/m³ (1.4 lb/ft³), wrapped with Uniguard fire blocking material
- Client's filling material: _____

RESULTS:

	Progressive Smouldering Within 1 hr After Start of Test (yes/no) -----	Flaming Within 1 hr After Start of Test (yes/no) -----
Initial Test:	No	No
Retest:	No	No



Received:09/04/2015	Completed:09/08/2015	Letter: P	JB	P.O.#:	Test Report #:	3-09601-0-
Client's Identification	Lot No: 3014-01151. Date of Mfg: 2-12-15. Style: All American AM59 Parchment (2259-54). Weight: 28.8/Linear Yard. Product End Use: Upholstery.					
Tested For: Ted Torres			Key Test: IMO 2010 Uph Cig			235
Uniroyal Engineered Products 501 South Water Street Stoughton, WI 53589			Tel: 1-(608)-873-6631		Ext:	
			Fax: 1-()- -			

REMARKS: None.

FAILURE CRITERIA:


Progressive smouldering or flaming within one hour after start of test.

CONCLUSION: Based on the above Results and Failure Criteria, the item tested:

Passes; Fails

CERTIFICATION: I certify that the above results were obtained after testing specimens in accordance with the procedures and equipment specified above.

 AUTHORIZED SIGNATURE
 GOVMARK
 /pm /bg

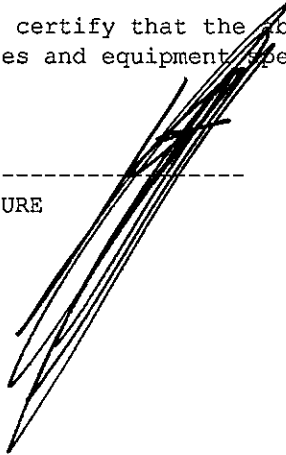

Robert I. Brown

SEP 08 2015

(Page 2 of 2)



Received:09/04/2015 Completed:09/08/2015 Letter: P1 JB P.O.#: Test Report #: 3-09601-1-

Client's Identification Lot No: 3014-01151. Date of Mfg: 2-12-15. Style: All American AM59 Parchment (2259-54). Weight: 28.8/Linear Yard.
 Product End Use: Upholstery.

Tested For: **Ted Torres** Key Test: IMO 2010 Uph Propane Flame 345
 Uniroyal Engineered Products
 501 South Water Street
 Stoughton, WI 53589
 Tel: 1-(608)-873-6631 Ext:
 Fax: 1-()- -

Category: Uph. Furniture (propane) LE 2012; V 5/15 PC: 16H /dl SM/mg
 Specifier: IMO

TEST PERFORMED: IMO 2010 FTP Code - International Code for Application of Fire Test Procedures - Resolution MSC.307(88): Annex I - Fire Test Procedures, Part 8 - Test For Upholstered Furniture

IGNITION SOURCE: 20 seconds propane flame (section 3.2)

TEST ITEM COMPOSITE

Cover Fabric --

- Client's cover fabric: (see "Client's Identification" section above)
- Standard cover fabric, 100% inherently flame retardant polyester fabric, approx. 220 g/m³

Filling Material --

- Non flame retardant flexible polyether foam, 22 kg/m³ (1.4 lb/ft³)
- Flame retardant polyurethane foam, Code Red II 35, 45 kg/m³ (2.8 lb/ft³)
- Non flame retardant flexible polyether foam, 22 kg/m³ (1.4 lb/ft³), wrapped with Uniguard fire blocking material
- Client's filling material: _____

RESULTS:	Flaming* (seconds)	Glowing* (seconds)	Smoking* (seconds)	Smoldering* (seconds)
Initial Test:	0	0	14	14
Retest:	0	0	19	19

* Values are reported after removal of burner tube ignition source.

REMARKS: None.

Received: 09/04/2015	Completed: 09/08/2015	Letter: P1	JB	P.O.#:	Test Report #:	3-09601-1-
Client's Identification	Lot No: 3014-01151. Date of Mfg: 2-12-15. Style: All American AM59 Parchment (2259-54). Weight: 28.8/Linear Yard. Product End Use: Upholstery.					
Tested For: Ted Torres	Uniroyal Engineered Products 501 South Water Street Stoughton, WI 53589				Key Test: IMO 2010 Uph Propane Flame	345
					Tel: 1-(608)-873-6631	Ext:
					Fax: 1-()- -	

FAILURE CRITERIA:


Flaming, glowing, smoking, or smouldering which exceeds 120 seconds.

CONCLUSION: Based on the above Results and Failure Criteria, the item tested:

Passes; Fails

CERTIFICATION: I certify that the above results were obtained after testing specimens in accordance with the procedures and equipment specified above.

 AUTHORIZED SIGNATURE
 GOVMARK
 /pm /bg

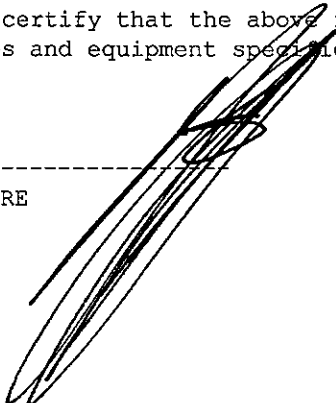

Robert I. Brown

(Page 2 of 2)

SEP 08 2015