

ITEM LTK 2"

DATE 04/2009



**YKK(USA)INC. MACON
PRODUCT DATA SHEET**


BUCKLE & NOTIONS

STRENGTH

		AVG KG	AVG LB
BREAK STRENGTH	70° F	92	202
SLIPPAGE (at break)			
RELEASE FORCE			

DIMENSIONS

	MM	INCH
A	62.5	2.5
B	25.50	1.0
C	8.25	0.3
D	52.20	2.1
E	12.40	0.5
F	0.00	0.0
G	0.00	0.0

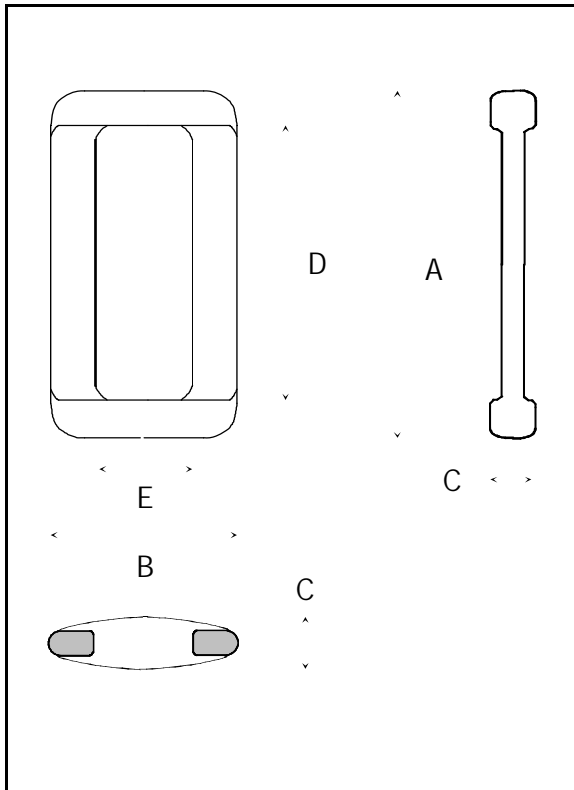

MATERIAL & CONSTRUCTION

DELRIN
PLASTIC INJECTION

PROPERTIES

COLOR	WASH	AATCC - 5
FASTENERS	DRYCLEAN	AATCC - 5
	WEATHERING 100 Hrs.	AATCC - 4 - 5
MELTING POINT (° F)		347 ° F
CHEMICAL RESISTANCE	SOLVENTS	Excellent resistance to a wide variety
	ACIDS/ALKALI	Not recommended outside the pH range of 4 ~ 9
IMPACT (NOTCHED IZOD)	-40 (° F)	1.2 FT LB/IN
	73 (° F)	1.4 FT LB/IN
FLAMMABILITY (FMVSS 302)		AVG 1.9 INCH/MIN
U.L. APPROVAL FOR PFD		NO

NOTICE - DISCLAIMER

798.0100

ANY INFORMATION CONTAINED HEREIN IS FOR THE SOLE PURPOSE OF PROVIDING PURCHASER WITH GENERAL KNOWLEDGE ABOUT YKK PRODUCTS, YKK DOES NOT MAKE ANY WARRANTY OF ANY KIND, NEITHER EXPRESS OR IMPLIED, AS TO THE PRODUCTS, PRODUCT PRICES OR OTHERWISE.