


ITEM LBRU 3/4"

DATE 12/2008



**YKK (USA) INC. MACON
PRODUCT DATA SHEET**

BUCKLE & NOTIONS

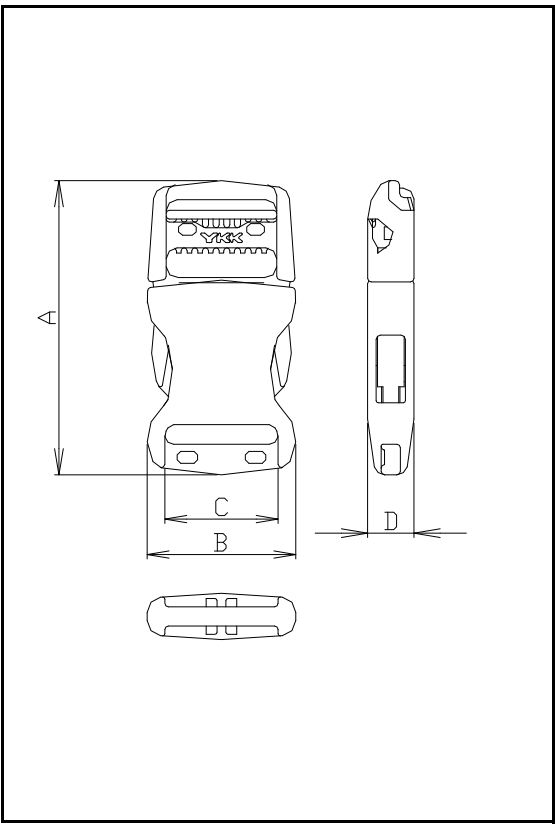

STRENGTH

		AVG LB
BREAKING STRENGTH	70° F	180.75
	-22° F	
	160° F	
SLIPPAGE (at 150 lb)		< 1"
ACCELERATED WEATHERING FATIGUE, 5000x	100 Hr.	
	300 Hr.	
CHEMICAL EXPOSURE:		
<ul style="list-style-type: none"> • Perchloroethylene 70 Hr. • Diesel Fuel 70 Hr. • Detergent 70 Hr. • Oil 70 Hr. 		

DIMENSIONS

	MM	INCH
A	54.9	2.2
B	26	1.0
C	19.5	0.8
D	8.6	0.3

MATERIAL & CONSTRUCTION

DELRIN
PLASTIC INJECTION

PROPERTIES

COLOR FASTENERS	WASH	AATCC - 5
	DRYCLEAN	AATCC - 5
	WEATHERING 100 Hr	AATCC - 4 - 5
MELTING POINT (° F)		347 ° F
CHEMICAL RESISTANCE	SOLVENTS	Excellent resistance to a wide variety of solvents
	ACIDS/ALKALI	Not recommended outside the pH range of 4 ~ 9
IMPACT	40 J (F)	4.0 FT LBS (IN)